


**AUSTRALIAN
MARINE
COMPLEX**
WESTERN AUSTRALIA

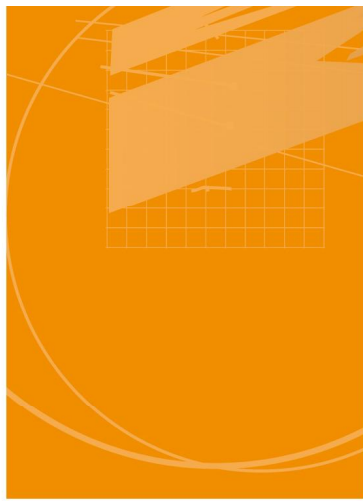

AGC: Crane assembly, testing and training

Two new offshore cranes destined for Woodside's North Rankin 'A' Platform were delivered to the AMC-CUF where one crane is being assembled and trialed.

To replicate the offshore installation, AGC are using 150 tonnes of steel to fabricate a 13 metre tall support structure on which to place the crane.

This will allow for light load tests and crane driver training ahead of shipping to the platform for installation and final commissioning by the end of 2008.

