


**AUSTRALIAN
MARINE
COMPLEX**
WESTERN AUSTRALIA

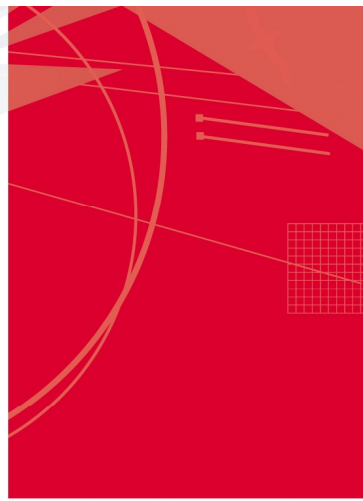

AGC returns to the CUF to build second installation in wharf extension project

Western Australian engineering firm AGC is using the CUF to complete a \$12 million contract to fabricate, assemble, deliver and install four 54 meter steel modules, each weighing in at four hundred tonnes.

The modules will be used to form the deck of a new 250-meter long section of wharf at Dampier.

The components of the modules were fabricated at AGC's Kwinana plant, and assembly at the CUF is expected to take approximately four months.

The modules will be despatched from the CUF's wharf in October 2006.

Last year AGC used the CUF to complete a contract to build modules used to construct a 450-meter extension to the Dampier wharf, which is used to load iron ore ships.

